



NATURAL
REFRIGERANT
R290

Key Features


The IM-30CNE-HC and IM-30CNE-HC-25 are compact sized cube ice makers, which utilise Natural Refrigerant R290.




Energy efficient, with the IM-30CNE-HC generating 19% energy savings compared to HFC equivalent model.*

- ✓ Members of the Emerald Class, Hoshizaki's new range of climate friendly ice makers.
- ✓ Can produce up to 30 kg and 25 kg of cube ice per 24 hours respectively (AT.10°C.WT.10°C).
- ✓ Unique ice making system that has an automatic rinse cycle. After every new batch of ice, the water reservoir drains and refills with fresh water. System comes with a magnetic water pump that has no direct coupling, which prevents any leakage.
- ✓ Closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- ✓ Electronically controlled to ensure an optimised ice making process under varying circumstances without the need for physical adjustments. Quality of ice is always consistent.
- ✓ Easily cleanable air filter allows end-users to carry out routine cleaning schedules. Extends product life expectancy and reduces the frequency and costs of maintenance call-outs.
- ✓ Stainless steel exterior with integrated door handles provides a hygienic and high quality finish.

* Based on Internal comparative study. Please contact your local sales branch to find out more.



IM-30CNE-HC
Ice: Cube (L)
Size: Approx. 28 x 28 x 32mm



IM-30CNE-HC-25
Ice: Cube (S)
Size: Approx. 25 x 25 x 23mm



Available Models

Model	Air Cooled	Water Cooled
IM-30CNE-HC	✓	
IM-30CNE-HC-25	✓	

Bins

Model	Type of Bin	Max. Bin Capacity approx.
IM-30CNE-HC	Self-contained	11.5kg
IM-30CNE-HC-25	Self-contained	11.5kg

Production


Model	Ice Production per 24h approx.	Temperature	Ice Production per Cycle approx.	Water Consumption per 24h approx.
IM-30CNE-HC	30kg 26kg 24kg	AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C	0.4kg/18 pcs	0,11m ³ 0,07m ³ 0,06m ³
IM-30CNE-HC-25	25kg 23kg 19kg	AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C	0.27kg/21 pcs	0,15m ³ 0,08m ³ 0,07m ³

For more information visit our website at
www.hoshizaki-europe.com

Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.



➔ CAD drawings available on our website

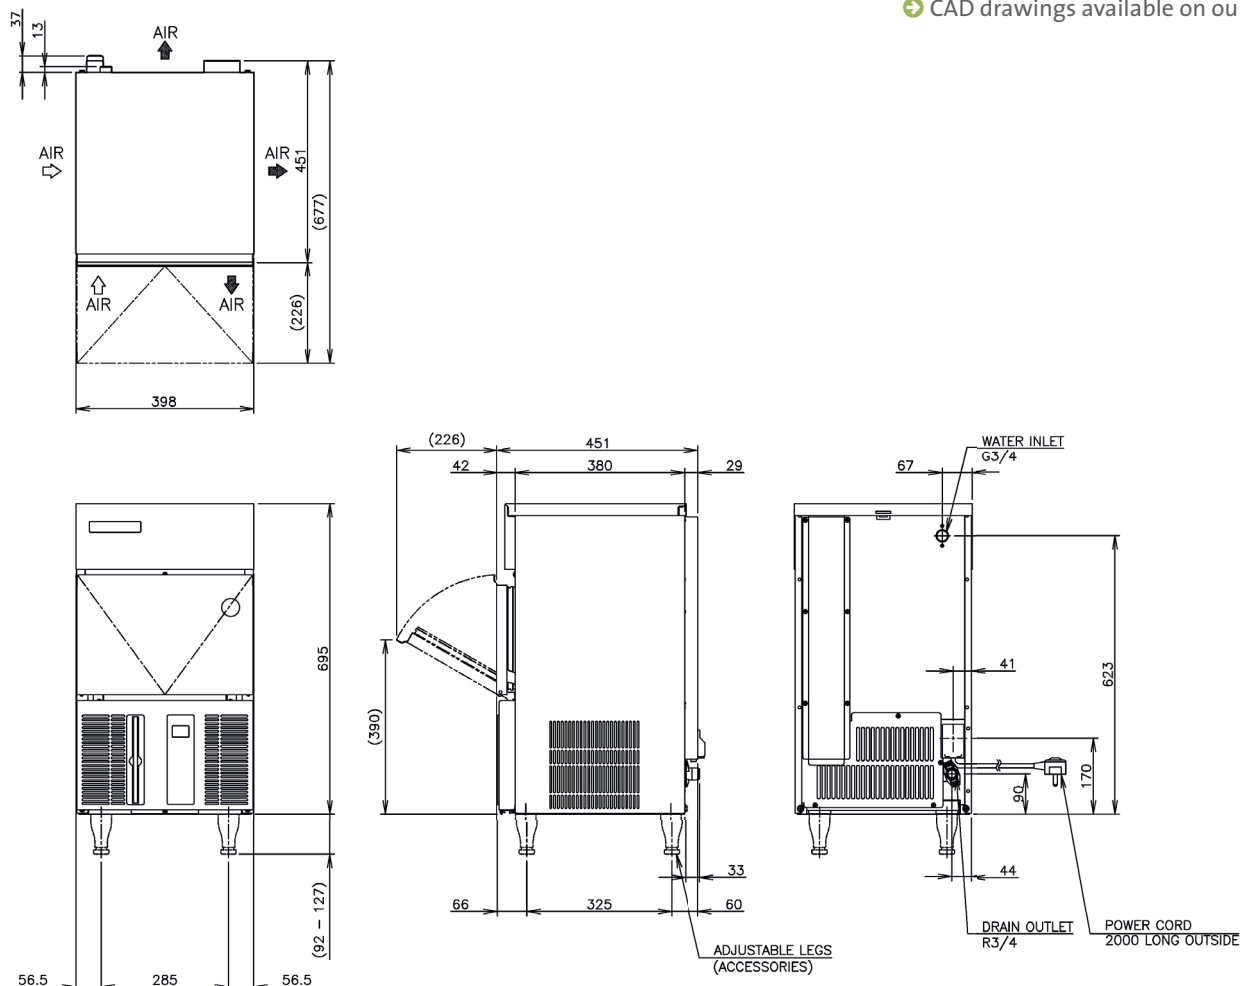

D15966 / 2015.03.14

Specifications

Dimensions W x D x H (mm)	398mm x 451mm x 695mm
AC Supply Voltage	1 PHASE 220-240V 50Hz
Electric Consumption (AT:32°C, WT:21°C)	230W
Heat Rejection (AT:32°C, WT:21°C)	540W
Refrigerant Charge	R290/65g
Isolation	Polyurethane
Weight Gross / Net	39 kg / 34 kg

Operation Requirements

Ambient Temperature	1 - 40°C
Water Supply Temperature	5 - 35°C
Water Supply Pressure	0,7-8bar (0,07-0,8MPa)
Voltage Range	Rated Voltage ± 6%

Accessories

Scoop
Leg
Installation Kit

For more information please
contact your local sales office:

Hoshizaki Belgium:
Hoshizaki Deutschland:
Hoshizaki France:
Hoshizaki Iberia:
Hoshizaki Middle East:

info@hoshizaki.be
info@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
sales@hoshizaki.ae

Hoshizaki Nederland:
Hoshizaki United Kingdom:
Other countries:

sales@hoshizaki.nl
uksales@hoshizaki.co.uk
sales@hoshizaki.nl

www.hoshizaki-europe.com